


2PC TYPE FLANGED END FLOAT BALL VALVE : WK2

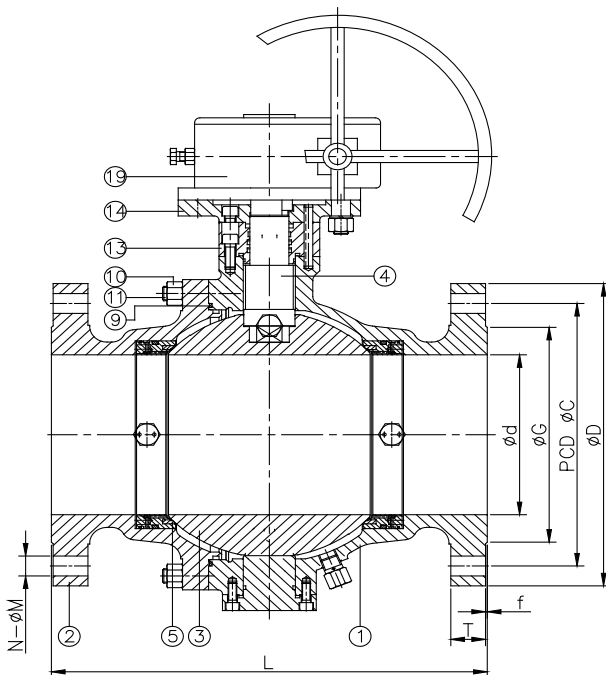

FEATURES

- Full port, 2"~56" (DN50~DN400)
- CLASS 150/300/600
- W.T. : -20°C~200°C (-4°F~392°F)
- Investment casting
- Blow-out proof stem
- Flange dimension:
ASME B16.5 CLASS
150/300 EN 1092-1
- Face to face:
ASME B16.10 CLASS
150/300 API 6D

ITEM	PARTS	MATERIAL	
1	BODY	ASTM A351-CF8M	
2	CAP		
3	BALL	ASTM A182-F316	
4	STEM		
5	SEAT	RTFE	
9	GASKET	RTFE	
10	NUT	ASTM A194-8M	
11	STUD	ASTM A193-B8M	
13	GLAND	ASTM A182-F316	
14	TOP FLANGE		
19	GEAR BOX	A216-WCB	

CLASS 150/300 ONLY, OTHER PRESSURE RATING PLEASE CONTACT US.

DN	d	G		C		D		L		T		f	N		M	
		CLASS 150	CLASS 300	CLASS 150	CLASS 300	CLASS 150	CLASS 300	CLASS 150	CLASS 300	CLASS 150	CLASS 300		CLASS 150	CLASS 300	CLASS 150	CLASS 300
100	100	157.2	157.2	190.5	200	230	255	229	305	22.3	30.2	2	8	8	19	22
150	150	215.9	215.9	241.3	269.9	280	320	394	403	23.9	35	2	8	12	22	22
200	201	269.9	269.9	298.5	330.2	345	380	457	502	27	39.7	2	8	12	22	25.5
250	252	323.8	323.8	362	387.4	405	445	533	568	28.6	46.1	2	12	16	25.5	29
300	303	381	381	431.8	450.8	485	520	610	648	30.2	49.3	2	12	16	25.5	32
350	334	412.8	412.8	476.3	514.4	535	585	686	762	33.4	52.4	2	12	20	29	32
400	385	469.9	469.9	539.8	571.5	595	650	762	838	35	55.6	2	16	20	29	35
450	436	533.4	533.4	577.9	628.6	635	710	864	914	38.1	58.8	2	16	24	32	35
500	487	584.2	584.2	635	685.8	700	775	914	991	41.3	62	2	20	24	32	35
600	589	692.2	692.2	749.3	812.8	815	915	1067	1143	46.1	68.3	2	20	24	35	41

unit:mm